

2-18 GHz Highpass



◆ Features:

- Low Loss
- Excellent VSWR
- Small Package



◆ Specifications:

Insertion Loss:	
2-18 GHz	<1.0 dB
VSWR:	
2-18 GHz	2.0:1
Stopband:	
DC-1.25 GHz	>50 dB
Connectors:	SMA (Male/Female)
Dimensions:	.98" X .69" X .40"
(excluding connectors)	(24.9 x 17.5 x 10.16mm)
Shock:	20G's, 1/2 Sine, 11 Ms
Vibration:	10 G's, 10 Hz - 2000 Hz
Temperature:	-55 to +85°C
Relative Humidity:	0—95%

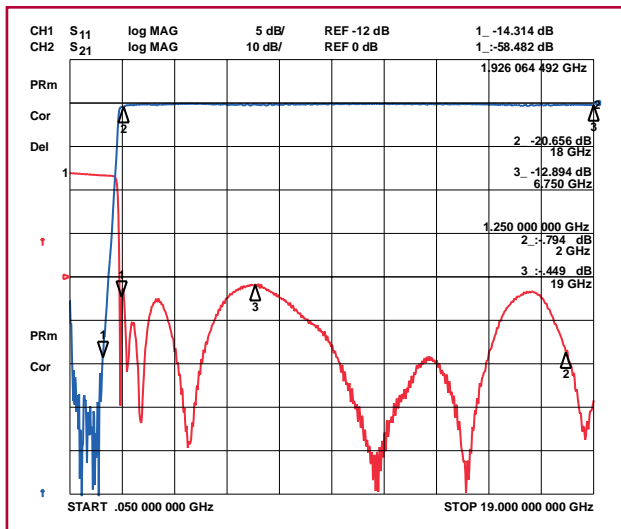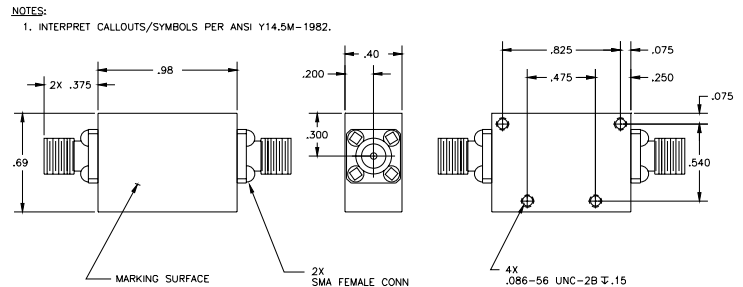

Amplitude Response

Filtering Solutions for Your Global Market

USA
 Phone: 410-749-2424
 FAX: 410-749-5725
 Email: sales@klmicrowave.com

EUROPE
 Phone: +44-(0)-1908-547920
 FAX: +44-(0)-1908-695284
 Email: sales@kleurope.com

Order On-Line @ www.klmicrowave.com

